STAINLESS STEEL 200 WOG GLOBE VALVE

Features:

- 200 WOG
- Temperature: -4°F to 356°F
- · Investment Cast Components
- Stainless Steel Body and Trim
- Inside Screw, Rising Stem
- · Conical Seat Design
- Threaded NPT Ends
- · Adjustable Packing

Standards:

• Pressure Test: API 598

• Material: ASTM/ASME B16.34

Connections: ANSI B1.20.1 (NPT)




Figure Number Matrix

F N W <u>1 7 B 2 0 0 SIZE</u>				
	<u>SIZE</u> 1/2 = D	CODES 1-1/4 = H		
For other valve materials or configurations, contact FNW Valve at (503) 287-8383 for sales assistance.	3/4 = F 1 = G	1-1/2 = J 2 = K		

Cv & Weight

Size	Cv	Wt. (lbs.)		
1/2	2.2	0.8		
3/4	3.6	1.0		
1	6.6	1.3		
1-1/4	10.6	2.0		
1-1/2	17.8	2.8		
2	29.2	4.0		

STAINLESS STEEL 200 WOG GLOBE VALVE

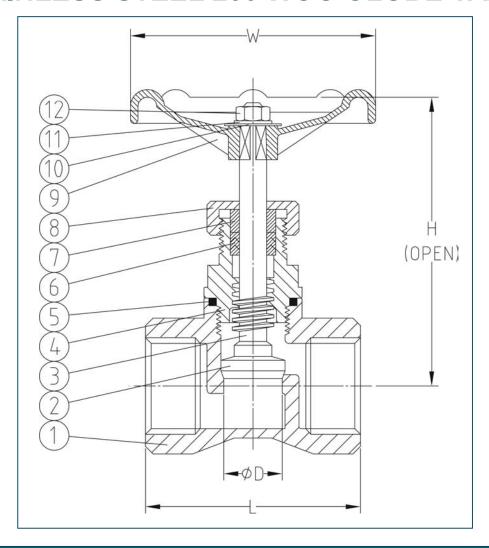

Dimensions (Inches)

Size	ØD	L	Н	W
1/2	0.47	2.05	3.11	2.76
3/4	0.59	2.36	3.58	2.76
1	0.79	2.88	4.13	3.15
1-1/4	0.98	3.19	5.00	3.15
1-1/2	1.26	3.54	5.59	3.54
2	1.57	3.98	6.22	3.94

Standard Materials

Ref. No.	Description	Material	Qty
1	Body	ASTM A351 Gr. CF8M	1
2	Disc	316SS	1
3	Stem	316SS	1
4	Bonnet	ASTM A351 Gr. CF8M	1
5	Body Seal	PTFE	1
6	Stem Packing	PTFE	1 Set
7	Gland	304SS	1
8	Gland Nut	ASTM A351 Gr. CF8M	1
9	Handwheel	Mico Steel	1
10	Name Plate	Aluminum	1
11	Handwheel Washer	304SS	1
12	Handwheel Nut	304SS	1

DOC: FNWGB17B06 Ver. 11/06

© 2006 - FNW. All rights reserved.

The FNW logo is a registered trademark of Ferguson Enterprises, Inc.

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.