

HT-SERIES WALL MOUNT REVERSE OSMOSIS SYSTEMS

AXEON® HT-Series Wall Mount Reverse Osmosis Systems are designed for filter and membrane servicing and are available in five models ranging in production capacities from 250 to 2,000 gallons per day. The HT-Series models are equipped with our unique EZMount™ two-piece wall mounting system for easy installation. An optional mobile stand is also available to convert any of the HT-Series models into floor standing systems.


FEATURES

- AXEON HF1-Series Low Energy Membranes
- AXEON SS-Series Membrane Housings
- AXEON 5-Micron Sediment Pre-Filter
- Pentair® 20" Slim Line Cartridge Housing
- AXEON Permeate and Concentrate Flow Meters
- AXEON 0-100 psi Glycerin-Filled Pre-Filter Pressure Gauge
- AXEON 0-300 psi Glycerin-Filled Pump Pressure Gauge
- Feed Low Pressure Switch
- Manual On and Off Control Switch
- GC® Feed Solenoid Valve

SPECIFICATIONS

MODELS	HT-500	HT-1000	HT-1500	HT-2000
Design				
Standard Recovery Rate %	26	41	50	58
Flow Rates				
Nominal Salt Rejection %	99	99	99	99
Membranes				
Membrane Quantity	2	3	2	3
Membrane Size	2521	2521	2540	2540
System Dimensions				
Approximate Dimensions ^A L x W x H (in / cm)	48 x 49 x 12 / 122 x 124 x 30	48 x 49 x 12 / 122 x 124 x 30	48 x 49 x 12 / 122 x 124 x 30	48 x 49 x 12 / 122 x 124 x 30
Approximate Weight (lbs / kg)	65 / 29.5	70 / 31.8	95 / 43.1	135 / 61.2

A. Does not include operating space requirements.

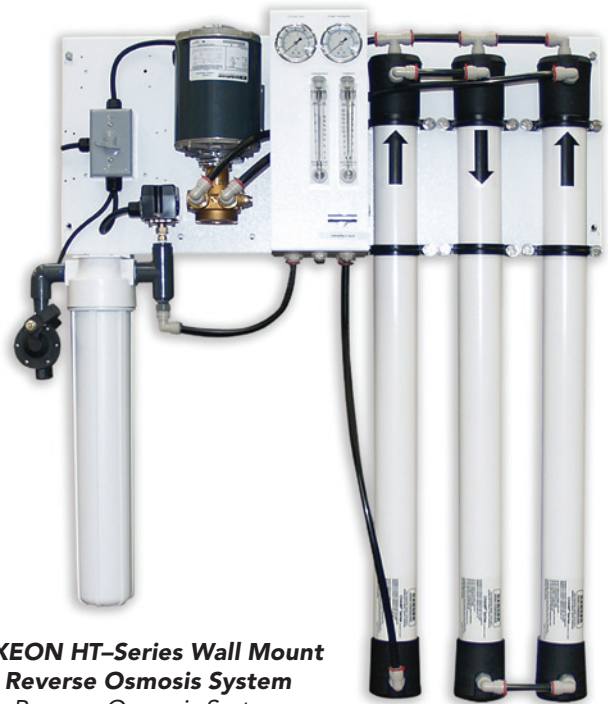

AXEON HT-Series Wall Mount Reverse Osmosis System
Reverse Osmosis System

- AXEON 316L Stainless Steel Concentrate Valve
- Fluid-O-Tech™ Low Lead Brass Rotary Vane High Pressure Pump
- ODP High Efficiency Carbonator Motor
- John Guest® Push/Pull Fittings with Locking Safety Clips
- White Powder Coated Aluminum Frame